





E45 / T245 : 45° chamfering endmills.

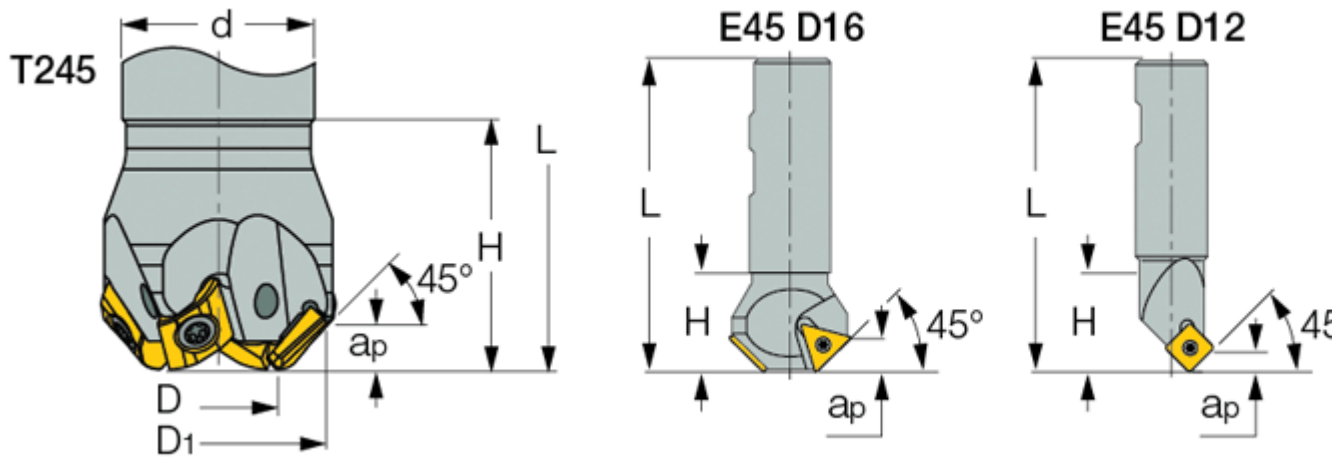

Designation	D	D1	Z	ap	L	H	d	Shank	Coolant	Kg
T245 ELN D12-4-C16-05	12.00	19.7	4	3.60	90.00	20.00	16.00	C	Y	0.12
T245 ELN D12-4-W16-05	12.00	19.7	4	3.60	90.00	20.00	16.00	W	Y	0.12
E45 D12-W20	12.00	23.2	1	5.60	100.00	30.00	20.00	W	N	0.20
E45 D12-C20 JPN	12.00	23.2	1	5.60	110.00	30.00	20.00	C	N	0.23
E45 D16-W25	16.00	35.9	2	9.70	100.00	33.00	25.00	W	N	0.35
E45 D16-C25 JPN	16.00	35.9	2	9.70	113.00	33.00	25.00	C	N	0.40
E45 D30-W25	30.00	46.1	3	7.80	100.00	35.00	25.00	W	N	0.37
E45 D30-W32	30.00	46.1	3	7.80	110.00	35.00	32.00	W	N	0.61
E45 D30-C32 JPN	30.00	46.1	3	7.80	115.00	35.00	32.00	C	N	0.64

For adaptation, click on "More Info".