




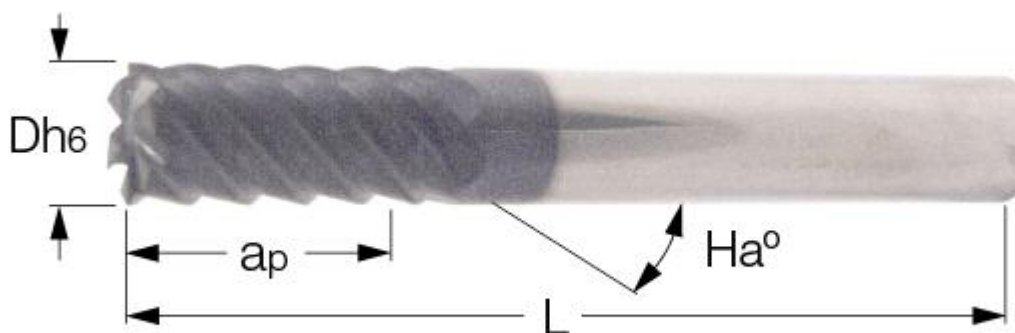

EC-D6 : 6 flute, 50° helix medium length solid carbide endmills. Used for finishing of hard materials up to 65 HRC.



Hard Materials



Designation	D	d	ap	L	Flute	Ha°	Shank	Rd°	fz(min)	fz(max)	Grade
EC-D6 06-13C06H57	6.00	6.00	13.00	57.00	6	50.0	C	5.0	0.03	0.07	IC903
EC-D6 06-13W06H57	6.00	6.00	13.00	57.00	6	50.0	W	5.0	0.03	0.07	IC903
EC-D6 08-20C08H63	8.00	8.00	20.00	63.00	6	50.0	C	5.0	0.03	0.09	IC903
EC-D6 08-20W08H63	8.00	8.00	20.00	63.00	6	50.0	W	5.0	0.03	0.09	IC903
EC-D6 10-22C10H72	10.00	10.00	22.00	72.00	6	50.0	C	5.0	0.03	0.10	IC900 IC903
EC-D6 10-22W10H72	10.00	10.00	22.00	72.00	6	50.0	W	5.0	0.03	0.10	IC903
EC-D6 12-25C12H83	12.00	12.00	25.00	83.00	6	50.0	C	5.0	0.04	0.11	IC903
EC-D6 12-25W12H83	12.00	12.00	25.00	83.00	6	50.0	W	5.0	0.04	0.11	IC903
EC-D6 14-30C14H83	14.00	14.00	30.00	83.00	6	50.0	C	5.0	0.04	0.12	IC903
EC-D6 14-30W14H83	14.00	14.00	30.00	83.00	6	50.0	W	5.0	0.04	0.12	IC903
EC-D6 16-32C16H92	16.00	16.00	32.00	92.00	6	50.0	C	5.0	0.05	0.13	IC903
EC-D6 16-32W16H92	16.00	16.00	32.00	92.00	6	50.0	W	5.0	0.05	0.13	IC903
EC-D6 20-38C20H104	20.00	20.00	38.00	104.00	6	50.0	C	5.0	0.05	0.13	IC903
EC-D6 20-38W20H104	20.00	20.00	38.00	104.00	6	50.0	W	5.0	0.05	0.13	IC903