





RM-SET-B-B : Single-edged indexable reamers used for blind holes.

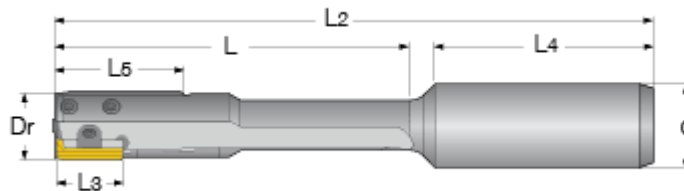

Designation	Dr	L3	L2	L4	L	L5	d	Po. Size
RM-SET8.000H6B-B-C16S	8.000	15.5	123.5	45.0	78.5	30.00	16.00	1.0
RM-SET9.000H6B-B-C16S	9.000	15.5	123.5	45.0	78.5	30.00	16.00	1.0
RM-SET10.000H6B-B-C16S	10.000	15.5	123.5	45.0	78.5	30.00	16.00	2.0
RM-SET11.000H6B-B-C16S	11.000	15.5	123.5	45.0	78.5	30.00	16.00	2.0
RM-SET12.000H6B-B-C16S	12.000	17.0	135.0	45.0	90.0	30.00	16.00	3.0
RM-SET13.000H6B-B-C16S	13.000	17.0	135.0	45.0	90.0	30.00	16.00	3.0
RM-SET14.000H6B-B-C16S	14.000	17.0	135.0	45.0	90.0	30.00	16.00	3.0
RM-SET15.000H6B-B-C16S	15.000	17.0	135.0	45.0	90.0	30.00	16.00	3.0
RM-SET16.000H6B-B-C20S	16.000	17.0	165.0	50.0	115.0	30.00	20.00	3.0
RM-SET17.000H6B-B-C20S	17.000	17.0	165.0	50.0	115.0	30.00	20.00	3.0
RM-SET18.000H6B-B-C20S	18.000	17.0	165.0	50.0	115.0	30.00	20.00	3.0
RM-SET19.000H6B-B-C20S	19.000	17.0	165.0	50.0	115.0	30.00	20.00	3.0
RM-SET20.000H6B-B-C25S	20.000	17.0	171.0	56.0	115.0	30.00	25.00	3.0
RM-SET21.000H6B-B-C25S	21.000	17.0	171.0	56.0	115.0	30.00	25.00	3.0
RM-SET22.000H6B-B-C25S	22.000	17.0	191.0	56.0	135.0	30.00	25.00	3.0
RM-SET23.000H6B-B-C25S	23.000	17.0	191.0	56.0	135.0	30.00	25.00	3.0
RM-SET24.000H6B-B-C25S	24.000	17.0	191.0	56.0	135.0	30.00	25.00	3.0
RM-SET25.000H6B-B-C25S	25.000	17.0	191.0	56.0	135.0	30.00	25.00	3.0
RM-SET26.000H6B-B-C25S	26.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0
RM-SET27.000H6B-B-C25S	27.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0
RM-SET28.000H6B-B-C25S	28.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0
RM-SET29.000H6B-B-C25S	29.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0
RM-SET30.000H6B-B-C25S	30.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0
RM-SET31.000H6B-B-C25S	31.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0
RM-SET32.000H6B-B-C25S	32.000	22.5	221.0	56.0	165.0	30.00	25.00	4.0

For user guide and cutting conditions, click on "More Info"