


GHDR/L (Short Pocket) : External holder for turning, grooving & parting.

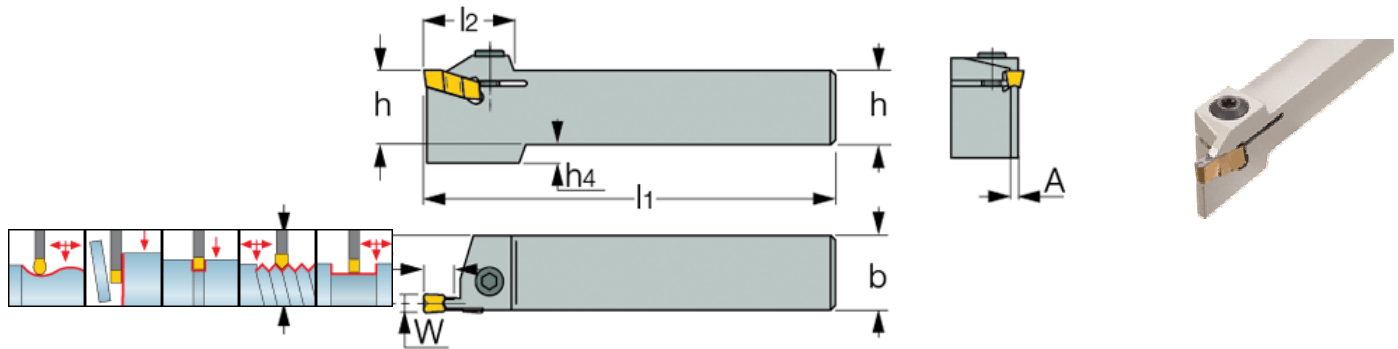

Designation	W min	W max	Tmax-r	h	b	l1	l2	f	A	h4	R/L
GHDL 12-3	2.8	4	8	12	12	110	25	10.8	2.4	4	L
GHDR 12-3	2.8	4	8	12	12	110	25	10.8	2.4	4	R
GHDL 16-3	2.8	4	9	16	16	110	26	14.8	2.4	4	L
GHDR 16-3	2.8	4	9	16	16	110	26	14.8	2.4	4	R
GHDL 16-3 ST	2.8	4	9	16	16	78	24	15	2.2	4	L
GHDR 16-3 ST	2.8	4	9	16	16	78	24	15	2.2	4	R
GHDL 20-3	2.8	4	9	20	20	120	26	18.8	2.4	-	L
GHDR 20-3	2.8	4	9	20	20	120	26	18.8	2.4	-	R
GHDL 25-3	2.8	4	9	25	25	135	26	23.8	2.4	-	L
GHDR 25-3	2.8	4	9	25	25	135	26	23.8	2.4	-	R
GHDL 16-4	4	5	10	16	16	110	26	14.4	3.2	4	L
GHDR 16-4	4	5	10	16	16	110	26	14.4	3.2	4	R
GHDL 16-4 ST	4	5.4	10	16	16	78	24.6	14	3.4	4	L
GHDR 16-4 ST	4	5.4	10	16	16	78	24.6	14	3.4	4	R
GHDL 20-4	4	5	10	20	20	120	26	18.4	3.2	-	L
GHDR 20-4	4	5	10	20	20	120	26	18.4	3.2	-	R
GHDL 25-4	4	5	10	25	25	135	27	23.4	3.2	-	L
GHDR 25-4	4	5	10	25	25	135	27	23.4	3.2	-	R
GHDL 32-4	4	5	10	32	32	150	27	30.4	3.2	-	L
GHDR 32-4	4	5	10	32	32	150	27	30.4	3.2	-	R
GHDL 20-5	5	6.4	12	20	20	120	29	17.9	4.2	-	L
GHDR 20-5	5	6.4	12	20	20	120	29	17.9	4.2	-	R
GHDL 25-5	5	6.4	12	25	25	135	29	22.9	4.2	-	L
GHDR 25-5	5	6.4	12	25	25	135	29	22.9	4.2	-	R
GHDL 32-5	5	6.4	12	32	32	150	29	29.9	4.2	-	L
GHDR 32-5	5	6.4	12	32	32	150	29	29.9	4.2	-	R
GHDL 25-6	6	6.4	12	25	25	135	29	22.3	5.4	-	L
GHDR 25-6	6	6.4	12	25	25	135	29	22.3	5.4	-	R
GHDL 25-P8	7	10	16.5	25	25	150	35.7	21.8	6.5	-	L
GHDR 25-P8	7	10	16.5	25	25	150	35.7	21.8	6.5	-	R
GHDL 32-P8	7	10	16.5	32	32	170	35.7	28.8	6.5	-	L
GHDR 32-P8	7	10	16.5	32	32	170	35.7	28.8	6.5	-	R

For using TIP and GPV inserts, toolholder seat needs to be modified according to insert profile to ensure clearance.