




PCHR/L-24 : PENTACUT holders for 5 edged inserts, used for grooving, parting and recessing.

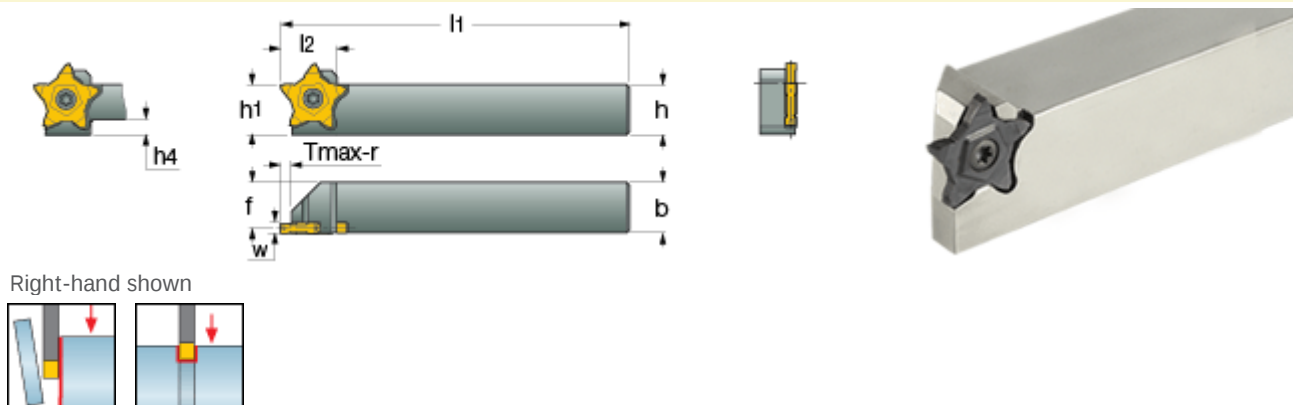

Designation	h	h1	b	W min	W max	f	l1	l2	h4	Tmax-r
PCHL 10-24	10.0	10.0	10.0	0.50	6.20	8.5	120.00	19.5	6.0	6.50
PCHR 10-24	10.0	10.0	10.0	0.50	6.20	8.5	120.00	19.5	6.0	6.50
PCHL 12-24	12.0	12.0	12.0	0.50	6.20	10.5	120.00	19.5	4.0	6.50
PCHR 12-24	12.0	12.0	12.0	0.50	6.20	10.5	120.00	19.5	4.0	6.50
PCHL 16-24	16.0	16.0	16.0	0.50	6.20	14.5	120.00	19.5	-	6.50
PCHR 16-24	16.0	16.0	16.0	0.50	6.20	14.5	120.00	19.5	-	6.50
PCHL 20-24	20.0	20.0	20.0	0.50	6.20	18.5	120.00	19.5	-	6.50
PCHR 20-24	20.0	20.0	20.0	0.50	6.20	18.5	120.00	19.5	-	6.50
PCHL 25-24	25.0	25.0	25.0	0.50	6.20	23.5	135.00	19.5	-	6.50
PCHR 25-24	25.0	25.0	25.0	0.50	6.20	23.5	135.00	19.5	-	6.50
PCHL 25-24-8	25.0	25.0	25.0	6.25	8.40	22.5	135.00	19.5	-	6.50
PCHR 25-24-8	25.0	25.0	25.0	6.25	8.40	22.5	135.00	19.5	-	6.50