





GHMUR/L : CUT-GRIP external holders for 45° undercutting.

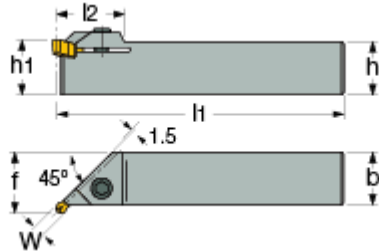

Right-hand shown



Designation	W max	h	h1	b	l1	l2	f
GHMUL 16	4.80	16.0	16.0	16.0	112.00	25.0	19.0
GHMUR 16	4.80	16.0	16.0	16.0	112.00	25.0	19.0
GHMUL 20	6.40	20.0	20.0	20.0	122.00	25.0	23.0
GHMUR 20	6.40	20.0	20.0	20.0	122.00	25.0	23.0
GHMUL 25	6.40	25.0	25.0	25.0	137.00	25.0	28.0
GHMUR 25	6.40	25.0	25.0	25.0	137.00	25.0	28.0

For $D > 100$ mm, GIP/GIF inserts can be used (clearance types UN, D or G are not required).